



Pumpen Intelligenz.

The one-of-a-kind Ceram coating from Wilo.

Information leaflet.



EMU
Technologie

ceram
protected

Ceram coating from Wilo.

Effective protection from abrasion and corrosion.



Wilo Ceram is only available for Wilo pumps and units. This special version in the form of a unique 2-component coating offers the best possible protection against aggressive media compared with

other coatings. Thanks to its increased resistance to abrasion and corrosion, it effectively prevents wear and chemical corrosion and always ensures optimal functionality and performance.

Thanks to Wilo Ceram, maintenance-related downtimes are greatly reduced and the service life of pumps and units is considerably increased. Far-sighted? We call it Pumpen Intelligenz.

Ceram coating from Wilo.

Technical data.

Description

Sprayable, solvent-free, 2-component polymer coating material with portions of aluminum oxide: for corrosion protection of our products even when under great mechanical stress.

Composition

Solvent-free epoxy polymer with solvent-free polyamine hardener and various extenders.

Properties

- Tough and hard, durable coating with high mechanical and chemical resistance, as well as good wear resistance
- Excellent wet adhesion as single- or multi-layered coating on steel surfaces
- Replaces tar-containing coatings
- Cost-savings thanks to the long service life, low maintenance and easy reparability.
- Tested by the "Bundesanstalt für Wasserbau" (German Federal Institute for Hydraulic Engineering) (BAW).
- Solvent-free.
- High gloss finish after hardening
- Later coating and repair possible

Technical data Ceram C0

Designation	Standard	Value	Unit
Density (mixture)	ASTM D 792	1.4	g/cm ³
Solid content (volume)		97	%
Solid content (weight)		98	%
Adhesive strength, steel	ISO 4624	15	N/mm ²
Impact strength	DIN EN ISO 6272	9	J
Temperature resistance			
Dry, continually		60	°C
Dry, for short periods		120	°C
Moist/liquid	depends on fluid, on request		

Technical data Ceram C0

Designation	Temperature range	Resistance
Sewage, alkaline (PH 11)	+20 °C/+40 °C	1/1
Sewage, weakly acidic (PH 6)	+20 °C/+40 °C	1/1
Sewage, strongly acidic (PH 1)	+20 °C/+40 °C	2/3
Ammonium hydroxide (5%)	+40 °C	3
Decanol (fatty alcohol)	+20 °C/+50 °C	1/1
Ethanol (40%)	+20 °C	1
Ethanol (96%)	+20 °C	3
Ethylene glycol	+20 °C	1
Heating oil, diesel	+20 °C	1
Compressor oil	+20 °C	1
Methyl ethyl ketone (MEK)	+20 °C	3
Caustic soda (5%)	+20 °C/+50 °C	1/2
Sodium chloride solution (10%)	+20 °C	1
Hydrochloric acid (5/10/20%)	+20 °C	2/2/3
Sulphuric acid (10/20%)	+20 °C	2/3
Nitric acid (5%)	+20 °C	3
Toluene	+20 °C	2
Cooling and industrial water	+50 °C	1
Xylene	+20 °C	1

Key: 1 = resistant, 2 = resistant for 40 days, 3 = spill resistant (immediate cleaning recommended)
Total layer thickness: at least 400 µm

Technical data for C1, C2, C3 on request

Ceram coating from Wilo. Long-lasting protection.



Wilo Ceram offers all-round protection for all unit components, whether they are inside or on the surface. Depending on the field of application, different Wilo Ceram coatings are offered, which are applied using various methods. For use in special fluids, the individual Ceram versions can also be combined with each other.

Ceram C0 is used both for the outer coating as well as for the interior coating. This is applied using the airless method in one layer with a thickness of 0.4 mm.

Ceram C1 is used for the interior coating of pump parts, especially for the impeller and suction port coating. This is applied in up to three layers with a total thickness of 0.8 mm.

Ceram C2 is used for the interior coating of pump parts, especially for the impeller and suction port coating. This is applied mechanically in one layer with a thickness of 1.5 mm.

Ceram C3 is also used for the interior coating of pump parts, usually for the pump housing. This is applied in one layer with a thickness of up to 3 mm. In the case of narrow gaps or play, mechanical processing is required.



Outer and interior coating

- To protect against heavy corrosion
- Increased efficiency thanks to lower friction losses



Impeller and suction port coating

- A perfect combination, e.g. C2 + C1 against strong abrasive corrosion in the case of moderately stressed pump components
- Can also be used in seawater and brackish water, as well as in industrial sewage areas





Pump housing, inside

- A perfect combination, e.g. C3 + C1 as a cost-effective alternative compared to special materials
- Later coating/repairs possible

Ceram coating from Wilo. Highest efficiency thanks to optimised durability.

Long-term process safety

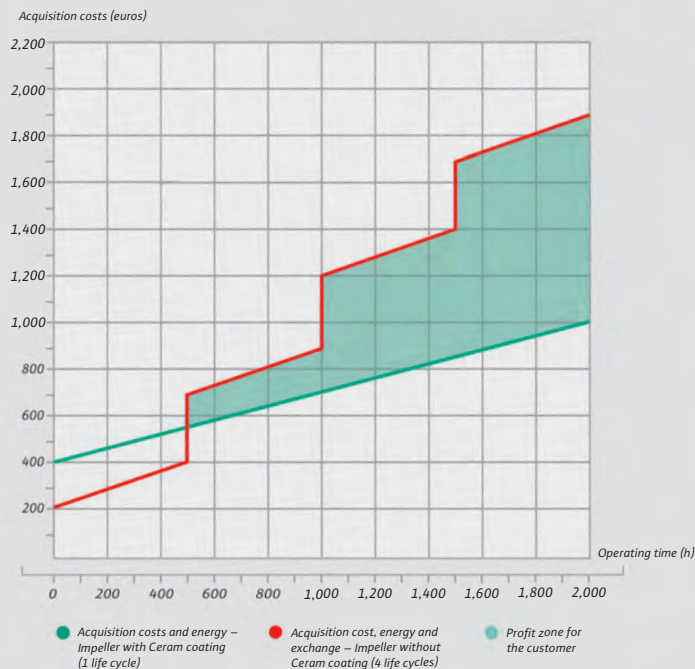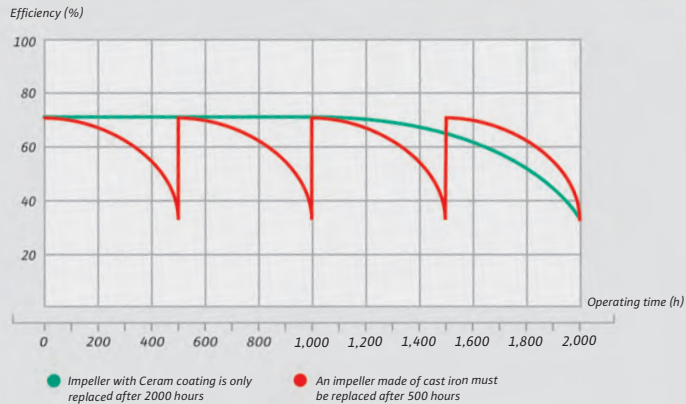

Sewage and sewage treatment plant pumps are constantly being exposed to aggressive fluids. Corrosion and abrasion, as well as UV light, heat, cold, salt, condensate and the alkalinity influence the surfaces and material structures of the units, sometimes with considerable impairment to the performance. This significantly reduces the hydraulic efficiency of a pump (see graph). This not only results in a higher energy consumption, but also leads to a greatly reduced service life due to the displacement of the load locus for the motor and hydraulics.

A specific application case uses just the example of an impeller coated with Ceram – to illustrate the performance and the associated potential for savings. In a kaolin plant, the fluid is so abrasive due to the large amount of very small-grain sand that a cast-iron impeller, which normally has an operating time of about 100,000 h with no problems, already had to be replaced after 500 hours of operation.

In a test period of 15 months, a total of four cast iron impellers were therefore replaced. This resulted in the following:

- Acquisition costs
- Loss in efficiency due to the corroded material
- This resulted in increasing energy costs
- Downtimes due to removal and installation

Under the same conditions in exactly the same time period, an impeller coated with Ceram was used. This impeller only had to be replaced after about 2000 hours of operation. The coating could withstand the high mechanical load for four times as long.

If one takes the overall costs over the entire service life of the pump into account, the investment costs for a unit coated with Ceram are less than 11 % and thus negligible. In addition, there is a high savings potential due to fewer repairs being required, resulting in fewer system downtimes. Therefore, a Ceram coating already pays for itself within the first 500 hours of operation, i.e. within the first year.



Germany – Salzgitter



Germany – Heidenau



Turkey – Tuzla



China – Yanquiao

Ceram coating from Wilo. Used world-wide.

Whether in the municipal water and sewage management, in the offshore area or industry: Everywhere where pumps and systems are exposed to aggressive fluids, Wilo Ceram offers long-lasting protection. Companies all over the world trust the one-of-a-kind

coating from Wilo. For a good reason: Wilo Ceram increases the service life of all mechanical components, lowers the energy costs noticeably, thanks to the higher efficiencies, and is therefore very convincing with their minimum life cycle cost.



Pumpen Intelligenz.

WILO SE
Nortkirchenstraße 100
44263 Dortmund
Germany
T +49 231 4102-0
F +49 231 4102-7363
wilo@wilo.com
www.wilo.com

WILO EMU GmbH
Heimgartenstraße 1
95030 Hof
Germany
T +49 9281 974-0
F +49 9281 96528
info@wiloemu.de
www.wilo.com

Wilo – International (Subsidiaries)

Argentina
WILO SALMSON
Argentina S.A.
C.1295ABI Ciudad
Autónoma de Buenos Aires
T + 54 11 4361 5929
info@salmson.com.ar

Austria
WILO Pumpen
Österreich GmbH
1230 Wien
T +43 507 507-0
office@wilo.at

Azerbaijan
WILO Caspian LLC
1065 Baku
T +994 12 5962372
info@wilo.az

Belarus
WILO Bel OOO
220035 Minsk
T +375 17 2503393
wilobel@wilo.by

Belgium
WILO SA/NV
1083 Ganshoren
T +32 2 4823333
info@wilo.be

Bulgaria
WILO Bulgaria Ltd.
1125 Sofia
T +359 2 9701970
info@wilo.bg

Canada
WILO Canada Inc.
Calgary, Alberta TZA 5L4
T +1 403 2769456
bill.lowe@wilo-na.com

China
WILO China Ltd.
101300 Beijing
T +86 10 80493900
wilobj@wilo.com.cn

Croatia
WILO Hrvatska d.o.o.
10090 Zagreb
T +38 51 3430914
wilo-hrvatska@wilo.hr

Czech Republic
WILO Praha s.r.o.
25101 Cestlice
T +420 234 098711
info@wilo.dk

Denmark
WILO Danmark A/S
2690 Karlslunde
T +45 70 253312
wilo@wilo.dk

Estonia
WILO Eesti OÜ
12618 Tallinn
T +372 6509780
info@wilo.ee

Finland
WILO Finland OY
02330 Espoo
T +358 207401540
wilo@wilo.fi

France
WILO S.A.S.
78390 Bois d'Arcy
T +33 1 30050930
info@wilo.fr

Great Britain
WILO (U.K.) Ltd.
DE14 2WJ Burton-
Upon-Trent
T +44 1283 523000
sales@wilo.co.uk

Greece
WILO Hellas AG
14569 Anixi (Attika)
T +302 10 6248300
info@wilo.gr

Hungary
WILO Magyarország Kft
2045 Törökbálint
(Budapest)
T +36 23 889500
wilo@wilo.hu

Ireland
WILO Engineering Ltd.
Limerick
T +353 61 227566
sales@wilo.ie

Italy
WILO Italia s.r.l.
20068 Peschiera
Borromeo (Milano)
T +39 25538351
wilo.italia@wilo.it

Kazakhstan
WILO Central Asia
050002 Almaty
T +7 727 2785961
in.pak@wilo.kz

Korea
WILO Pumps Ltd.
621-807 Gimhae
Gyeongnam
T +82 55 3405800
wilo@wilo.co.kr

Latvia
WILO Baltic SIA
1019 Riga
T +371 67 145229
mail@wilo.lv

Lebanon
WILO SALMSON
Lebanon
12022030 El Metn
T +961 4 722280
wsl@cyberia.net.lb

Lithuania
WILO Lietuva UAB
03202 Vilnius
T +370 5 2136495
mail@wilo.lt

The Netherlands
WILO Nederland b.v.
1551 NA Westzaan
T +31 88 9456 000
info@wilo.nl

Norway
WILO Norge AS
0975 Oslo
T +47 22 804570
wilo@wilo.no

Poland
WILO Polska Sp. z o.o.
05-090 Raszyn
T +48 22 7026161
wilo@wilo.pl

Portugal
Bombas Wilo-Salmson
Portugal Lda.
4050-040 Porto
T +351 22 2080350
bombas@wilo.pt

Romania
WILO Romania s.r.l.
077040 Com. Chiajna Jud.
Ilfov
T +40 21 3170164
wilo@wilo.ro

Russia
WILO Rus ooo
123592 Moscow
T +7 495 7810690
wilo@orc.ru

Saudi Arabia
WILO ME – Riyadh
Riyadh 11465
T +966 1 4624430
wshoula@watanaiind.com

Serbia and Montenegro
WILO Beograd d.o.o.
11000 Beograd
T +381 11 2851278
office@wilo.co.yu

Slovakia
WILO Slovakia s.r.o.
82008 Bratislava 28
T +421 2 45520122
wilo@wilo.sk

Slovenia
WILO Adriatic d.o.o.
1000 Ljubljana
T +386 1 5838130
wilo.adriatic@wilo.si

South Africa
Salmson South Africa
1610 Edenvale
T +27 11 6082780
errol.cornelius@
salmson.co.za

Spain
WILO Ibérica S.A.
28806 Alcalá de Henares
(Madrid)
T +34 91 8797100
wilo.iberica@wilo.es

Sweden
WILO Sverige AB
35246 Växjö
T +46 470 727600
wilo@wilo.se

Switzerland
EMB Pumpen AG
4310 Rheinfelden
T +41 61 83680-20
info@emb-pumpen.ch

Taiwan
WILO-EMU Taiwan Co. Ltd.
110 Taipei
T +886 227 391655
nelson.wu@
wiloemutaiwan.com.tw

Turkey
WILO Pompa Sistemleri
San. ve Tic. A.Ş.
34530 Istanbul
T +90 216 6610211
wilo@wilo.com.tr

Ukraine
WILO Ukraina t.o.w.
01033 Kiev
T +38 044 2011870
wilo@wilo.ua

Vietnam
Pompes Salmson Vietnam
Ho Chi Minh-Ville Vietnam
T +84 8 8109975
nkm@salmson.com.vn

United Arab Emirates
WILO ME – Dubai
Dubai
T +971 4 3453633
info@wilo.com.sa

USA
WILO-EMU USA LLC
Thomasville,
Georgia 31792
T +1 229 5840097
info@wilo-emu.com

USA
WILO USA LLC
Melrose Park, Illinois 60160
T +1 708 3389456
mike.easterley@
wilo-na.com

Wilo – International (Representation offices)

Algeria
Bad Ezzouar, Dar El Beida
T +213 21 247979

Armenia
375001 Yerevan
T +374 10 544336

Bosnia and Herzegovina
71000 Sarajevo
T +387 33 714510

Georgia
0179 Tbilisi
T +995 32 306375

Macedonia
1000 Skopje
T +389 2 3122058

Mexico
07300 Mexico
T +52 55 55863209

Moldova
2012 Chisinau
T +373 2 223501

Rep. Mongolia
Ulaanbaatar
T +976 11 314843

Tajikistan
734025 Dushanbe
T +992 37 2232908

Turkmenistan
744000 Ashgabat
T +993 12 345838

Uzbekistan
100015 Tashkent
T +998 71 1206774

March 2009